February 2016



NAME: MILANO CODE: PPLOW

CLASSIFICATION: Materic bottom paint for decorations in relief. KIND OF USE: The product is a bottom layer to obtain good effect in relief. COLOUR: White CHEMICAL COMPOSITION: acrylic copolymer modified in water emulsion and special extenders. SPECIFIC WEIGHT: 1.100+/-0.020 Kg/lt VISCOSITY OF PRODUCT: 2700+/-300 cps APPLICATION: roller, spatula, brush DILUTION: ready for use. If necessary 3-5% with water, maximum

MEDIUM OUTPUT mq/lt per coat: 2 - 3 mq/lt for coat DRYING: with air at 20°C and humidity 60%. Application at +5° C minimum. out of touch in the depth time of covering 30-60 min 2-3h 4-5 h

TABLE DIR.2004/42/CE :

A/I-BA Product= Decorative effects Limits UE(2010)=200 gr/lt C.O.V. gr/Lt=50gr/Lt. Dilution for application= 5% with water C.O.V. (ready to be used) gr/Lt.= Max 50gr/Lt.

BRILLIANCE : glazed

PREPARATION OF THE SURFACE: On new surface perfectly stabilized, apply a coat of acrylic primer SPECIAL FIXATIVE and then a coat with roller of uniform white primer DAS.


On old surface, brush thoroughly to remove all loose or flaking parts, restoring the missing parts with plaster, then proceed like for new surface.

APPLICATION CYCLES: When the surface is prepared apply a coat with roller, brush or spatula. To distribute the product on all the surface. Then return with suitable tool to obtain final effect.

STABILITY IN STOCK: 1 year at +5°/+35°C in the oiginal seald containers. Protect from freezing weather

NOTE: Available in lithographed bucklets of 14 L, 4 L, 1L

All the informations in this card are exact and accurate, as we know, so they must be considered reliable. In any case they can't mean a guarantee from our, as the conditions of its use out of our control.

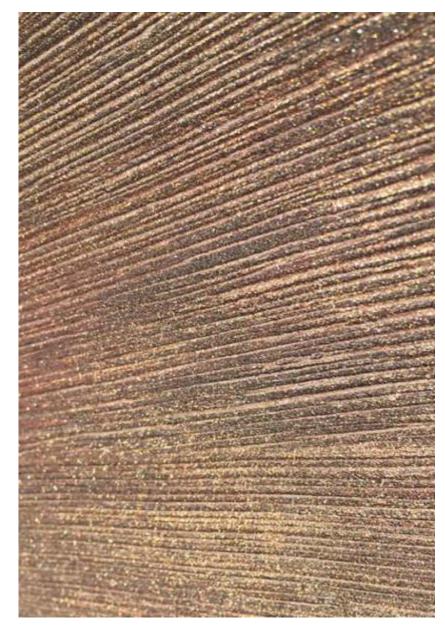

Milano + Ferrum